
QAI DESIGN F505-D-3 – SPECIFIED TECHNOLOGIES INC. (STI)

CAN/ULC S115 - WALL DESIGN

PENETRANT TYPE	RATING MINUTES CAN/ULC S115 (2.5 Pa)			
	F	FH	FT	FTH
2(a) Sch 40 PVC	60	0	45	0
2(b) Sch 40 XFR PVC	60	0	45	0
2(c) Sch 40 NAPSYS-HR PVC	60	0	15	0
2(d) SDR 11 Aquarise CPVC	60	0	45	0
2(e) SDR 11 CPVC	60	0	45	0
2(f) SDR 9 PEX	60	0	60	0
2(g) Aluminum EMT	60	0	0	0

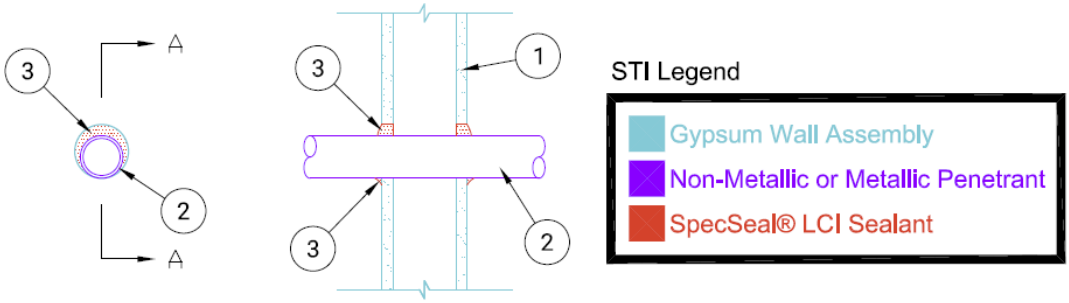

Section A-A

No.	COMPONENT	DESCRIPTION	
1	Substrate	Type:	1-hour wood or steel stud and gypsum wall assembly designed and installed in accordance with the applicable code.
		Opening:	2(a,b,c,d,e,g) Maximum 76 mm (3 in.) diameter 2(f) Maximum 64 mm (2.5 in.) diameter
2	Penetrant	Approved Penetrants	(a) Schedule 40 Polyvinyl Chloride (PVC) Pipe – Open System (b) Schedule 40 XFR Polyvinyl Chloride (PVC-XFR) Pipe – Open System (c) Schedule 40 NAPSYS-HR Polyvinyl Chloride (PVC-HR) Pipe – Open System (d) SDR11 Aquarise Chlorinated Polyvinyl Chloride (CPVC) – Open System (e) SDR11 Chlorinated Polyvinyl Chloride (CPVC) – Open System (f) SDR 9 Cross Linked Polyethylene (PEX) Tubing – Open System (g) Aluminum Electrical Metallic Tubing (EMT)
		Penetrant Size:	(a,b,c,d,e,g) Maximum 51 mm (2 in.) diameter (f) Maximum 38 mm (1.5 in.) diameter
		Installed Annular Space	(a,b,c,d,e) 0 mm (0 in., point contact) to 16 mm (0.63 in.) (f) 0 mm (0 in., point contact) to 22 mm (0.88 in.) (g) 0 mm (0 in., point contact) to 21 mm (0.83 in.)
		Installation:	Penetrant to be installed eccentrically or concentrically within the openings. Penetrant is required to be rigidly supported on both sides of the wall assembly.
3	Firestop System	Approved Firestop:	SpecSeal® LCI Sealant.
		Installation	SpecSeal® LCI Sealant is applied at minimum 16 mm (5/8 in.) depth installed into the opening filing the gap around the penetrant and built up to a nom 6 mm (1/4 in.) past the surface of the wall on both sides of the wall. 6 mm (1/4 in.) diam bead of sealant installed at point contact locations.

Note: Installation is to be in accordance with the above design listing, the applicable code, and the manufacturer's installation instructions for ensuring ratings noted are achieved.