



QAI Design B1067-1e –ROCKWOOL COMFORTBATT® / COMFORTBOARD® 80 / COMFORTBOARD® 110 - CAN/ULC-S124 – Classification A & B protective covering for foamed insulation

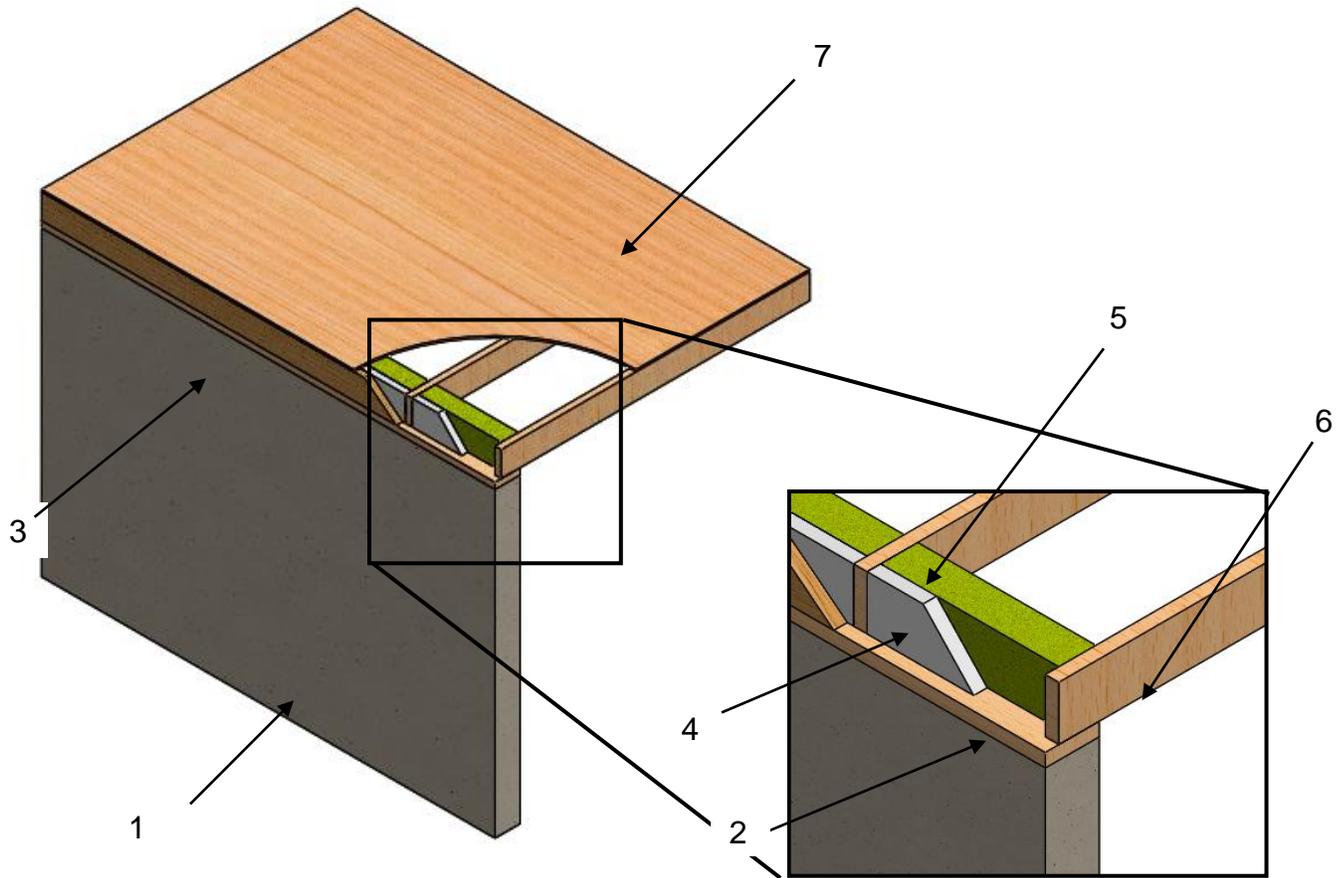


No .	COMPONENT	DESCRIPTION
1	Concrete Foundation	Concrete foundation wall
2	Bearing Plate	Standard bearing plate
3	Rim Joist	Standard rim joist
4	Foam Insulation	Type: Foamed Plastic
		Maximum R-Value: 7.5 per inch
5	Protective Covering of Foam Insulation	Certified Manufacturer: ROCKWOOL.
		Certified Product Name: Comfortbatt® Comfortboard® 80 Comfortboard® 80 Comfortboard® 110 Comfortboard® 110
		Assembly Class: Classification B Classification B Classification A Classification B Classification A
		Minimum Thickness: 5-1/2-inches (140 mm) 2-inches (51 mm) 3-inches (76 mm) 2-inches (51 mm) 3-inches (76 mm)
		Minimum Density: 1.8 lb/ft ³ (28.8 kg/m ³) 8.0 lb/ft ³ (128 kg/m ³) 8.0 lb/ft ³ (128 kg/m ³) 11.0 lb/ft ³ (176 kg/m ³) 11.0 lb/ft ³ (176 kg/m ³)
		Installation: Friction fit into the joist cavity.
6	Floor Joists	Standard floor joists system
7	Sheathing	Standard floor sheathing

QAI Design B1067-1e –ROCKWOOL COMFORTBATT® - CAN/ULC-S124 – Alternative Installation Method – Friction Fit Batt Insulation

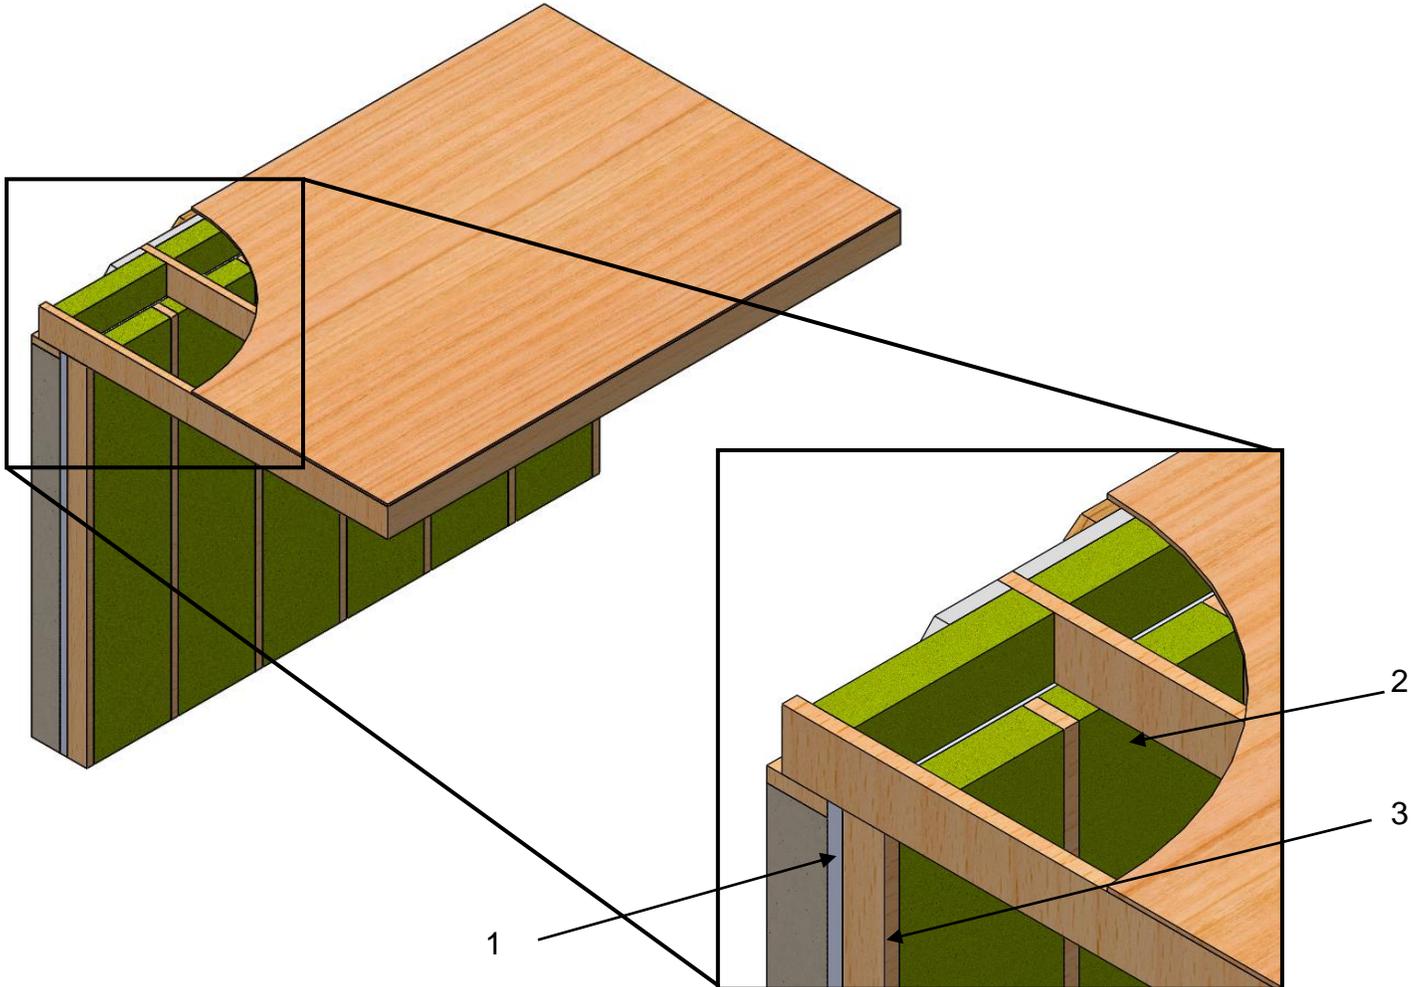

No.	COMPONENT	DESCRIPTION	
1	Foam Insulation	Type:	Foamed Plastic
		Maximum R-Value:	7.5/inch
2	Protective Covering of Foam Insulation	Certified Manufacturer:	Rockwool
		Certified Product Name:	Comfortbatt®
		Assembly Class:	Classification B
		Minimum Thickness:	5-1/2-inches (140 mm)
		Minimum Density:	1.8 lb/ft ³ (28.8 kg/m ³)
		Installation:	Friction fit into wall stud cavity.
3	Wall Studs	Minimum 2-inch x 6-inch (38 mm x 140 mm) wood wall studs complying with the applicable code.	

QAI Design B1067-1e –ROCKWOOL COMFORTBOARD® 80 / COMFORTBOARD® 110 - CAN/ULC-S124 – Alternative Installation Method – Anchored Insulation Board

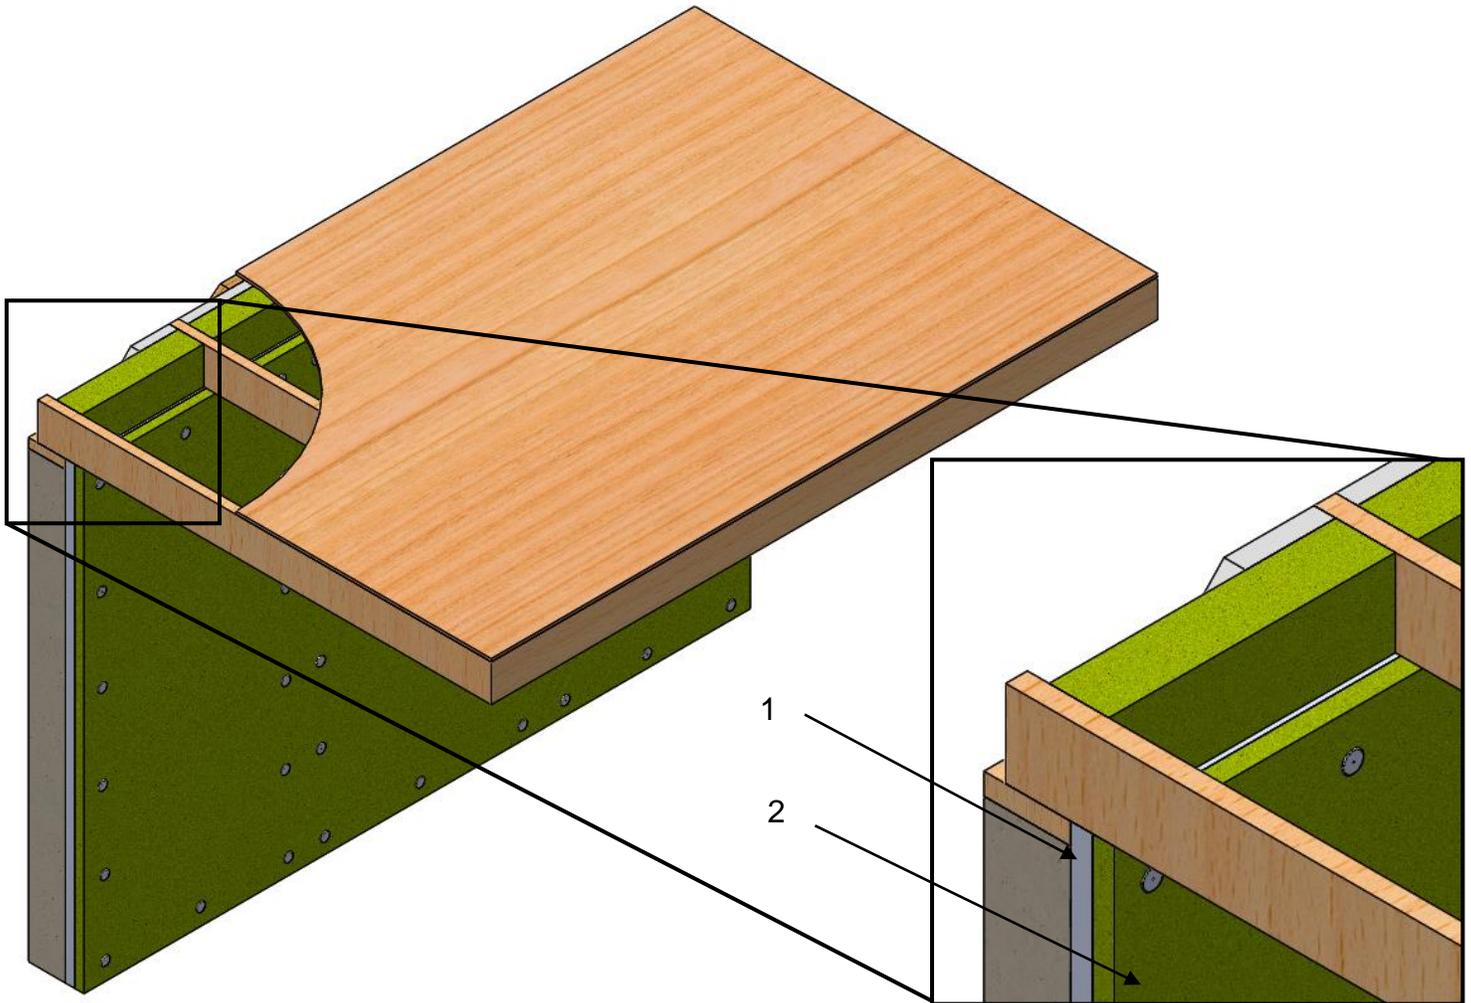

No.	COMPONENT	DESCRIPTION		
1	Foam Insulation	Type:	Foamed Plastic	
		Maximum R-Value:	7.5/inch	
2	Protective Covering of Foam Insulation	Certified Manufacturer:	Rockwool	
		Certified Product Name:	Comfortboard® 80 / Comfortboard® 110	
		Assembly Class:	Classification A	Classification B
		Minimum Thickness:	3-inches (76 mm)	2-inches (51 mm)
		Minimum Density:	8.0 lb/ft ³ (128 kg/m ³)	8.0 lb/ft ³ (128 kg/m ³)
		Installation:	Fastened through the foamed plastic using Ramset Insulfast insulation fasteners or non-combustible fasteners at manufacturer's recommended instructions, anchored into code compliant substrate. Tight butt-edge fit installation.	