


**QAI Listing P343-1A Cash Acme SharkBite PEX Wall Assembly  
UL 263, ASTM E119, CAN/ULC S101  
1 Hour Fire Resistance Rated Wall Assembly  
Non-Load Bearing**

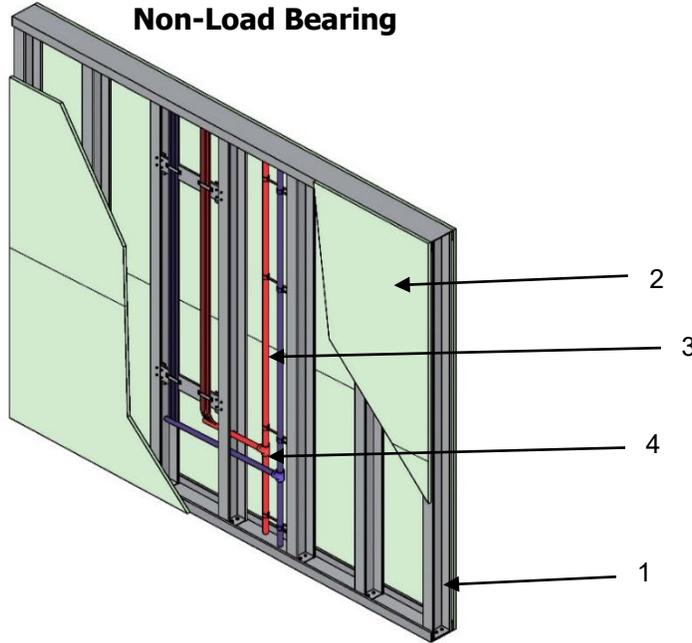

No.	COMPONENT	DESCRIPTION	
1	<b>Wall Framing</b>	Stud Type:	Galvanized steel stud and track manufactured in conformance with ASTM C 645
		Minimum Gauge	25 Gauge
		Minimum Size:	6 inch by 1-1/4 inch (152 mm x 32 mm)
		Maximum Spacing:	16 inches (406 mm) on center (OC)
		Installation:	Steel studs shall be fastened to the track using min. 5/16 inch (8 mm) pan or wafer head screws
2	<b>Gypsum Wall Board</b>	Type:	Type X gypsum wallboard complying with ASTM C1396
		Thickness:	Single layer of 5/8 inch (16 mm)
		Application:	Sheathing is to be fastened to studs with 1-1/4 inch (29 mm) length #6 Type S self drilling fine thread screws spaced at 8 inches (200 mm) on center around the perimeter, and 12 inch (305 mm) on center spacing in the field. Joints to be taped and mudded, and fastener heads to be mudded as per CSA A82.31-M or ASTM C840 (Minimum Level 3)
3	<b>Non-Metallic Tubing</b>	Certified Manufacturer:	Cash Acme
		Certified Product:	SharkBite PEX-a or PEX-b Tubing
		Nominal Tubing Sizes:	1/2 inch to 2 inch (12 mm x 51 mm)
		Installation:	Installed to a maximum of 4.85 lbs per linear feet (7.23 kg per linear meter) of cavity. Tubing shall be supported on steel or wood cross-bracing spaced at maximum 48 inch (1219 mm) OC. Armacell AP Armaflex pipe insulation allowed for installation to maximum density 2.64 lbs/ft (3.93 kg/m).
4	<b>Manifolds / Fittings</b>	Certified Manufacturer:	Cash Acme
		Certified Product:	EvoPEX Universal, 2XL, 2XLR, Plastic Crimp (Barb), Brass Crimp (Barb), Plastic Expansion, Brass Expansion, SharkBite Max, PEX Press, Standard Copper Brass or Steel Fittings.
		Installation:	Installed to a max. 4.82 lbs (2.19 kg) per cavity.
5	<b>Fasteners</b>	Product(s):	Steel straps, Hangerloc nylon straps, or Oatey Half Talon pipe clamps
		Max. Spacing:	48 in. (1219 mm)