


QAI LISTING B1096-1a
NOREX WALL & ROOF / CEILING PANELS
CAN/ULC S138 ROOM CONFIGURATION

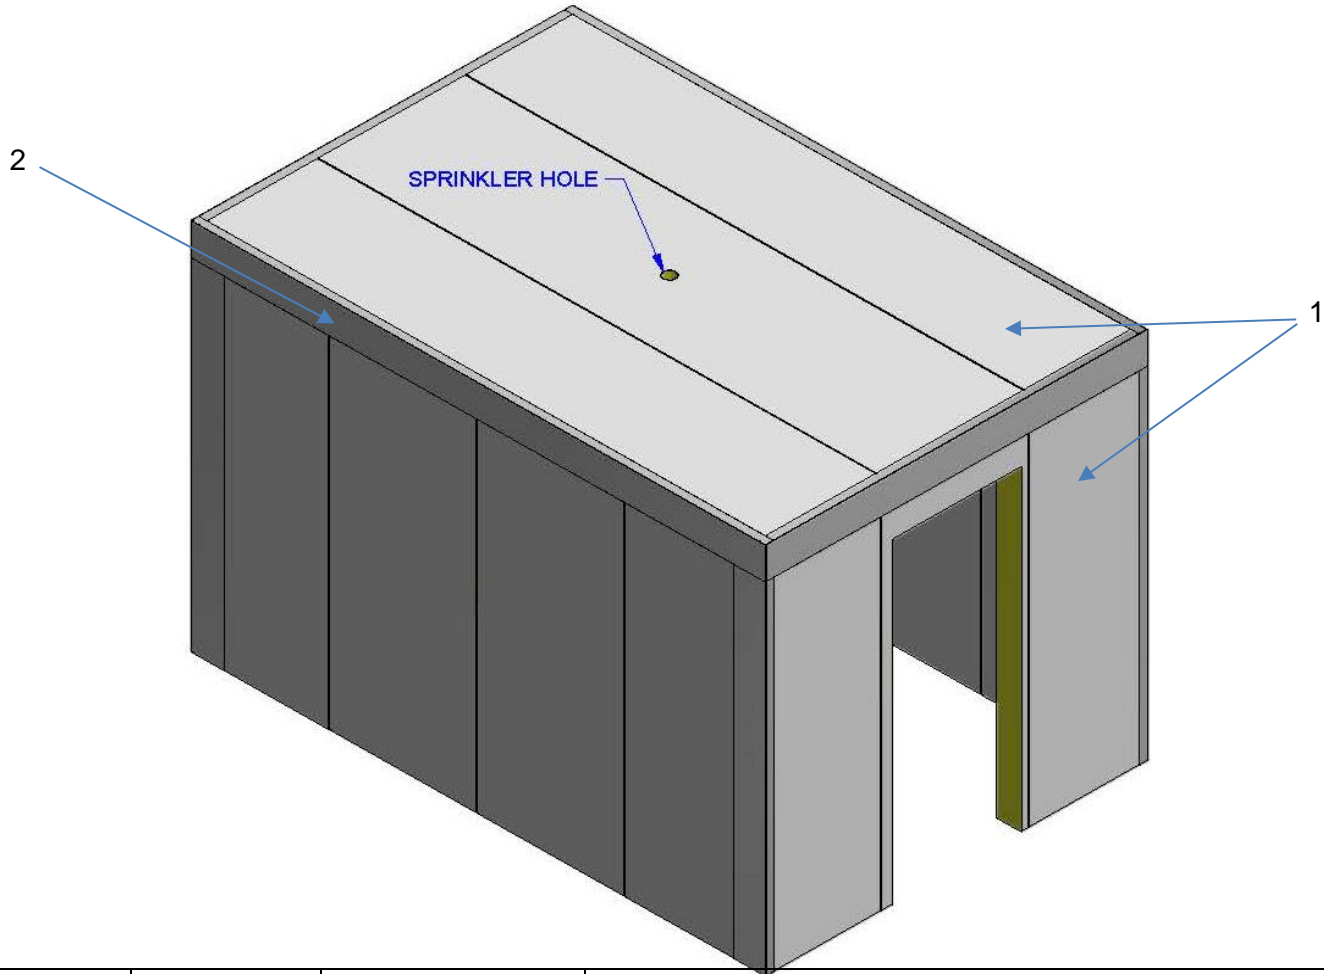

NUMBER	PART	DESCRIPTION	
1	Ceiling / Wall Panels	Manufacturer:	Norbec Architectural
		Approved Types:	NOREX-L, NOREX-H, NOREX-S Panels.
		Thickness:	51 – 152 mm (2 – 6 inches)
		Core:	Polyisocyanurate (PIR) maximum 41.6 kg/m ³ (2.6 lbs/ft ³).
		Skins:	Minimum 26 Gauge 0.404 mm (.0159 inches)
		Installation:	Panels are factory built with silicone caulking on both female halves of the joint. Optional butyl or silicone caulking can be applied. Panels are flashed at ceiling to wall joint, and corners.
3	Flashing	General:	Light Gauge steel flashing mechanically secured to protect room corner joints.
4	Sprinkler (Not Shown)	General:	155°F (68°C) activation temperature, pendant style listed sprinklers listed by an approved agency.