


**QAI LISTING B1102-1b**  
**Falk Panels Canada Ltd - NBC 3.1.5.12 – 4(d) (CAN/ULC S101)**  
**15 minute Remain-in-place - Non-Load Bearing Fire-Resistance-Rated Construction**

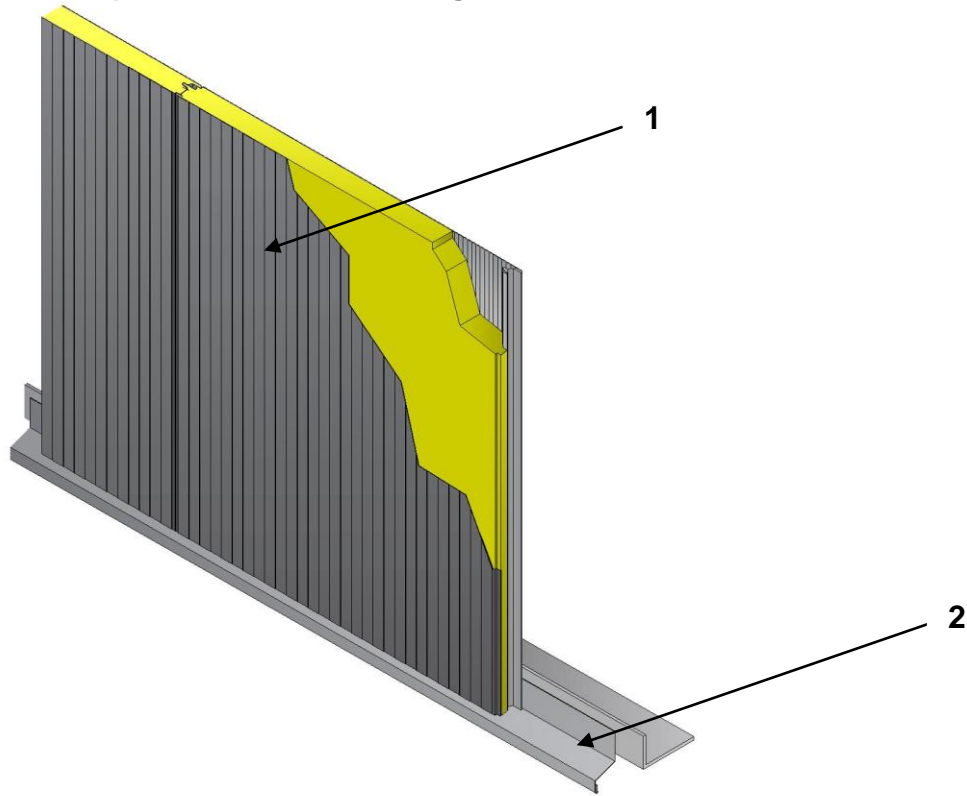

NUMBER	PART	DESCRIPTION	
1	Wall Panel	Listee:	Falk Panels Canada Ltd.
		Approved Product(s):	1060 WB and 1000 TR / TR+ / GL Panels
		Facers:	Minimum 0.404 mm (26 Gauge) steel.
		Core:	Maximum thickness: 185 mm (7-1/4 inches) Polyisocyanurate foam (1000 TR / TR+ GL) 155 mm (6 inches) Polyisocyanurate foam (WB 1060) Maximum density 40 kg/m <sup>3</sup> (2.5 lbs/ft <sup>3</sup> ).
		Joint:	Female / Male connection. Joint stitching and / or sealants are optional.
		Installation:	Panels to be mechanically secured to resist appropriate loading per model building code. Connections are to be in accordance with Falk Panels Canada installation instructions, and or a registered design professional for approval by the authority having jurisdiction. .
2	Supports / End Flashing	General:	Flashing or support to be installed per Falk Panels Canada Ltd. installation instructions, Design Professional, or Authority having jurisdictions requirements.

Note: Wind resistance and seismic considerations are outside the scope of QAI listing.