



BUILDING PRODUCTS LISTING PROGRAM

Customer: Chemco Inc.

Class: Fire Retardant Treated Wood Products

Location: Ferndale, WA

Website: <https://www.saferwood.com>

Listing No. B1152-1

Project No. B1152-1, Edition 3

Effective Date November 7, 2024

Last Revised Date: March 09, 2026

Standards: CAN/ULC S102-18 *Standard Method of Test for Surface Burning Characteristics of Building Materials and Assemblies.*

ASTM E84-22 *Standard Test Method for Surface Burning Characteristics of Building Materials (ASTM E84 30-Minute Duration).*

ASTM E2768-11(R2018) *Standard Test Method for Extended Duration Surface Burning Characteristics of Building Materials (30 min Tunnel Test).*

ASTM D2898-10(R2017) *Standard Practice for Accelerated Weathering of Fire-Retardant-Treated Wood for Fire Testing.*

ASTM D3201/D3201M-20 *Standard Test Method for Hygroscopic Properties of Fire-Retardant Wood and Wood-Base Products.*


Product:

- FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Lumber
- FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Plywood



- Species:
- Lumber Grades: Southern Yellow Pine (SYP), Douglas-fir (DF), Spruce-Pine-Fir (SPF), Western Red Cedar (WRC), Redwood (RW), Hemlock-Fir (HF)
 - Engineered Wood Structural Panels: Southern Yellow Pine (SYP), Douglas-fir (DF), Western Red Cedar (WRC), White Spruce (WS), Western Hemlock-Fir.
 - Siding and Decking (Non-Structural) Grade: DF, SPF, WRC, RW, HF, Thermally Modified Ayous (TM AY), Thermally Modified Nordic Pine (TM NP)

Label(s): Example labels found in QAI certified FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Wood products are outlined below:

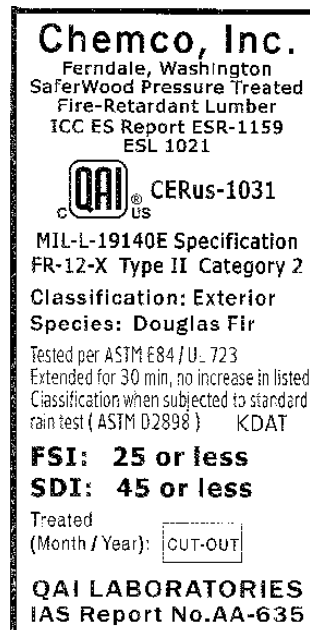

Ratings: The following outlines FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Wood product ratings:

Table 1. FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Lumber Surface Burning Characteristics per CAN/ULC S102.

SPECIES GRADE	Flame Spread Rating (FSR) ¹	Smoke Developed Classification (SDC)
LUMBER: SYP, DF, SPF, WRC, RW, HF	≤ 25 ²	≤ 100
WOOD STRUCTURAL PANEL: SYP, SPF, DF, WRC, WS, HF	≤ 25 ²	≤ 100
SIDING AND DECKING (NON-STRUCTURAL) TM AY, TM NP	< 25 ²	< 100



Note 1: Flame spread Rating is determined after weathering in accordance with ASTM D2898 per the 2020 National Building Code of Canada Section 3.1.4.8 clause 3) for exterior grade products.

Note 2: Flame spread Classification complies with Section 3.1.4.5 of the 2020 National Building Code of Canada Section 3.1.4.5 clause b) flame spread rating requirements.

Table 2. FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Lumber Surface Burning Characteristics per ASTM E84 (Extended) / ASTM E2768¹

PRODUCT	SPECIES	Flame Spread Index (FSI)	Smoke Developed Index (SDI)	Flame Front ²
LUMBER:	SYP, DF, SPF, WRC, RW, HF	< 25	< 450	< 10.5 feet.
WOOD STRUCTURAL PANEL ³ :	SYP, DF, WS, WRC, HF	< 25	< 450	< 10.5 feet.
SIDING AND DECKING (NON-STRUCTURAL)	TM AY, TM NP	<25	<450	< 10.5 feet

Note 1: Flame spread index is determined after weathering in accordance with ASTM D2898 for exterior grade products.

Note 2: No evidence of significant progressive combustion after extended 20 minutes duration.

Note 3: Testing of wood panels was conducted without ripping or longitudinal cut of 1/8" (0.375 inches) included.

FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Lumber products strength adjustment factors are outlined in QAI Code Evaluation Report CER_{US}-1031. Strength adjustments outlined in the noted CER_{US}-1031 should be used in conjunction with the approved wood design methodology where fire-retardant treated wood products are used in load-bearing applications (National Design Specification USA / CSA 086 Canada).

FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel Fire Retardant Treated Wood Structural Panel products strength adjustment factors are outlined in QAI Code Evaluation Report CER_{US}-1042. Strength adjustments outlined in the noted CER_{US}-1042 should be used in conjunction with the approved wood design methodology where fire-retardant treated wood products are used in load-bearing applications (National Design Specification USA / CSA 086 Canada).

FRX, Saferwood-FX, Thermex-FR, Mataverde, Flame Repel products have less than 28% moisture content when tested in accordance with ASTM D3201 at a 92 percent-relative humidity.

Note: Final acceptance of the product in the intended application is to be determined by the authority having jurisdiction.

The materials, products or systems listed herein have been qualified to bear the QAI Listing Mark under the conditions stated with each Listing. Only those products bearing the QAI Listing Mark are considered to be listed by QAI. No warrantee is expressed or implied, and no guarantee is provided that any jurisdictional authority will accept the Listing found herein. The appropriate authorities should be contacted regarding the acceptability of any given Listing. Visit the QAI Online Listing Directory located at www.qai.org for the most up to date version of this Listing and to validate that this QAI Listing is active. Questions regarding this listing may be directed to info@qai.org. Please include the listing number in the request.
