


QAI LISTING B1154-1a
VAGA V-TAG AND V-CAM WALK-IN COOLER AND FREEZER PANELS
CAN/ULC S138 ROOM CONFIGURATION

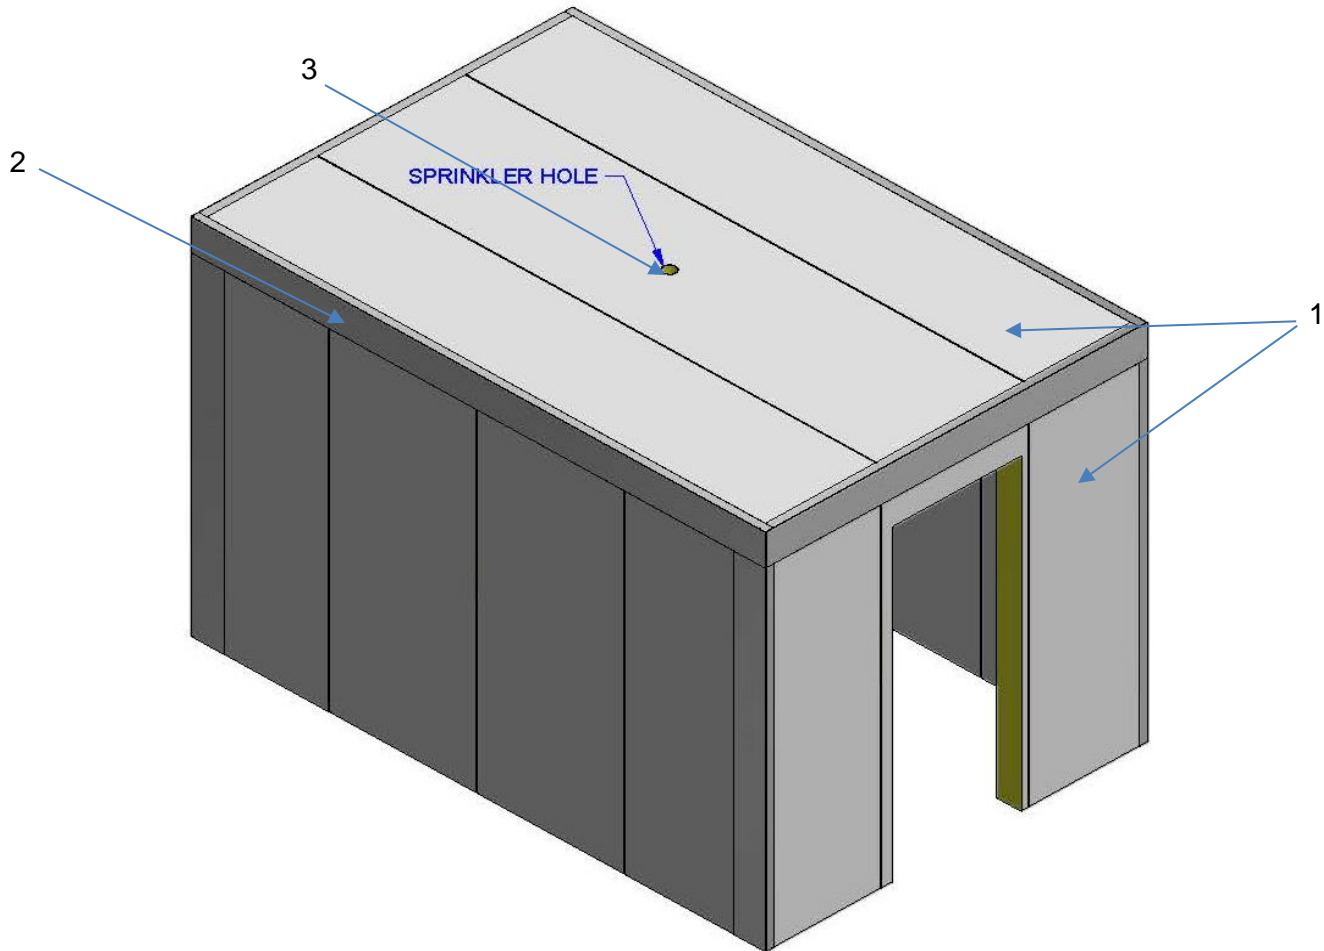

NUMBER	PART	DESCRIPTION	
1	Ceiling / Wall Panels	Manufacturer:	VAGA Refrigeration, Inc.
		Approved Types:	V-TAG and V-CAM Insulated Metal Panels (IMP).
		Thickness:	64 – 152 mm (2.5 – 6 inches).
		Core:	Polyurethane (PUR) maximum 40 kg/m ³ (2.5 lbs/ft ³).
		Skins:	Minimum 26 Gauge 0.404 mm (.0159 inches)
		Installation:	Panels are factory built and can be provided with optional gaskets or butyl sealant. Panels are flashed in corners per below. Panel joints are required finished with continuous Nuco Self-Seal Non-Sag GG-200 silicone firestop, and panel joints mechanically fastened at top and bottom of panel into steel U-channel.
2	Flashing	General:	Light Gauge steel angle flashing of minimum 51 mm x 51 mm (2 inches x 2 inches) mechanically fastened at 405 mm (16 inches) on center at wall to ceiling, wall to floor, and wall to wall corners.
3	Sprinkler (Not Shown)	General:	Standard response 68°C (155°F) activation temperature, pendant style listed sprinklers listed by an approved agency.

Page 1 of 1

Visit the QAI Online Listing Directory located at www.qai.org for the most up to date version of this Listing and to validate that this QAI Listing is active.