


QAI DESIGN F505-D-3 – SPECIFIED TECHNOLOGIES INC. (STI)

CAN/ULC S115 - WALL DESIGN

PENETRATION TYPE	RATING MINUTES			
	CAN/ULC S115 (2.5 Pa)			
	F	FH	FT	FTH
2(a) Sch 40 PVC	60	0	45	0
2(b) Sch 40 XFR PVC	60	0	45	0
2(c) Sch 40 NAPSYS-HR PVC	60	0	15	0
2(d) SDR 11 Aquarise CPVC	60	0	45	0
2(e) SDR 11 CPVC	60	0	45	0
2(f) SDR 9 PEX	60	0	60	0
2(g) Aluminum EMT	60	0	0	0

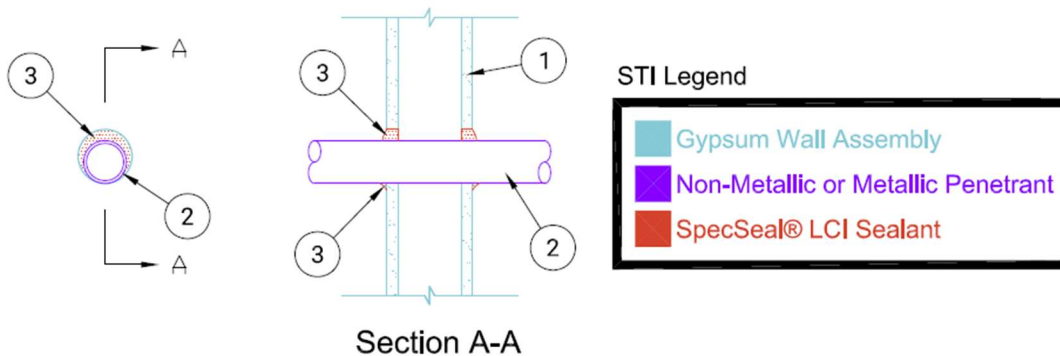

No.	COMPONENT	DESCRIPTION
1	Substrate	Type: 1-hour wood or steel stud and gypsum wall assembly designed and installed in accordance with the applicable code.
		Opening: 2(a,b,c,d,e,g) Max 76 mm (3 in.) diameter 2(f) Max 64 mm (2.5 in.) diameter
2	Penetration	Approved Penetrations (a) Schedule 40 Polyvinyl Chloride (PVC) Pipe – Open System (b) Schedule 40 XFR Polyvinyl Chloride (PVC-XFR) Pipe – Open System (c) Schedule 40 NAPSYS-HR Polyvinyl Chloride (PVC-HR) Pipe – Open System (d) SDR11 Aquarise Chlorinated Polyvinyl Chloride (CPVC) – Open System (e) SDR11 Chlorinated Polyvinyl Chloride (CPVC) – Open System (f) SDR 9 Cross Linked Polyethylene (PEX) Tubing – Open System (g) Aluminum Electrical Metallic Tubing (EMT)
		Penetration Size: (a,b,c,d,e,g) Maximum 51 mm (2 in.) diameter (f) Maximum 38 mm (1.5 in.) diameter
		Installed Annular Space (a,b,c,d,e) 0 mm (0 in., point contact) to 16 mm (0.63 in.) (f) 0 mm (0 in., point contact) to 22 mm (0.88 in.) (g) 0 mm (0 in., point contact) to 21 mm (0.83 in.)
		Installation: Penetration to be installed eccentrically or concentrically within the openings. Penetration is required to be rigidly supported on both sides of the wall assembly.
3	Firestop System	Approved Firestop: SpecSeal® LCI Sealant.
		Installation: SpecSeal® LCI Sealant is applied at min 16 mm (5/8 in.) depth installed into the opening filling the gap around the penetrant and built up to a nom 6 mm (1/4 in.) past the surface of the wall on both sides of the wall. 6 mm (1/4 in.) diam bead of sealant installed at point contact locations.

Note: Installation is to be in accordance with the above design listing, the applicable code, and the manufacturer's installation instructions for ensuring ratings noted are achieved.

Visit the QAI Online Listing Directory located at www.qai.org for the most recent version of this Listing to validate that this QAI Listing is active.